

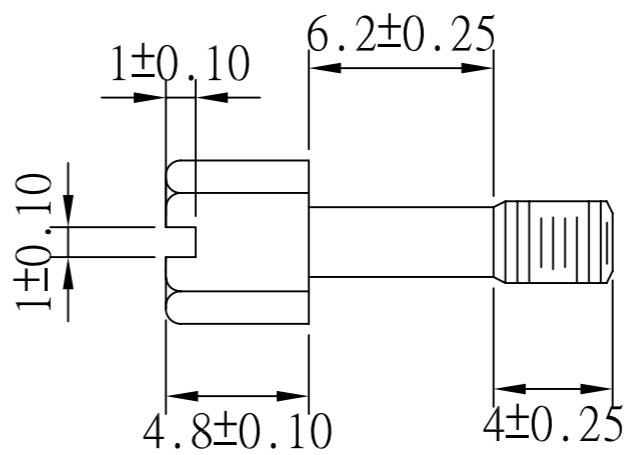
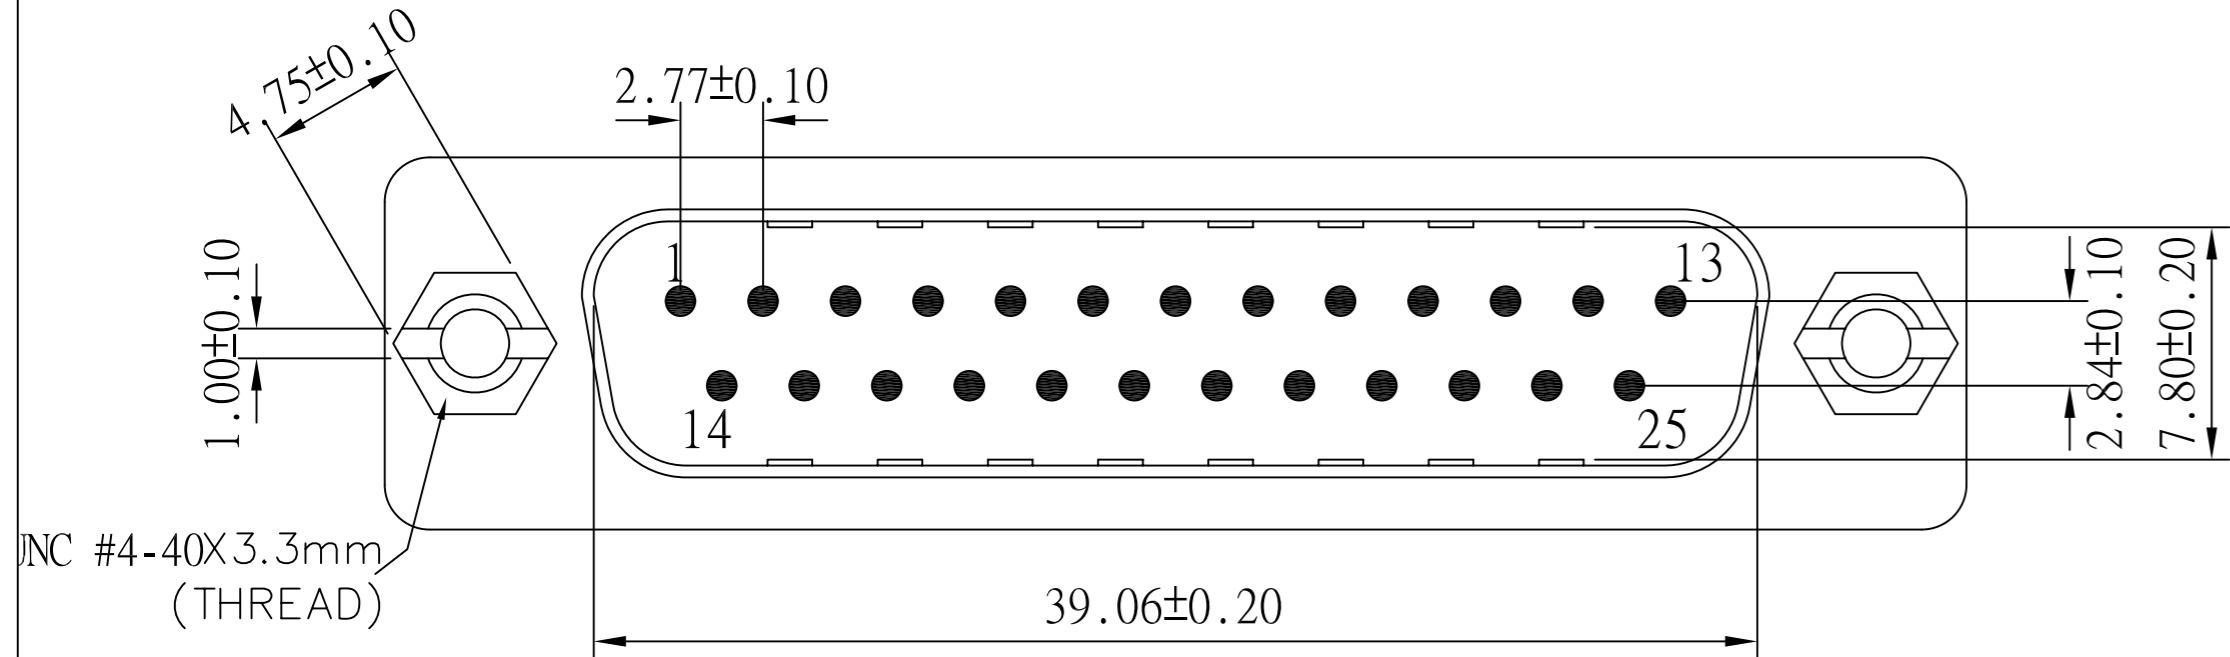



UNC #4-40 Hexscrew

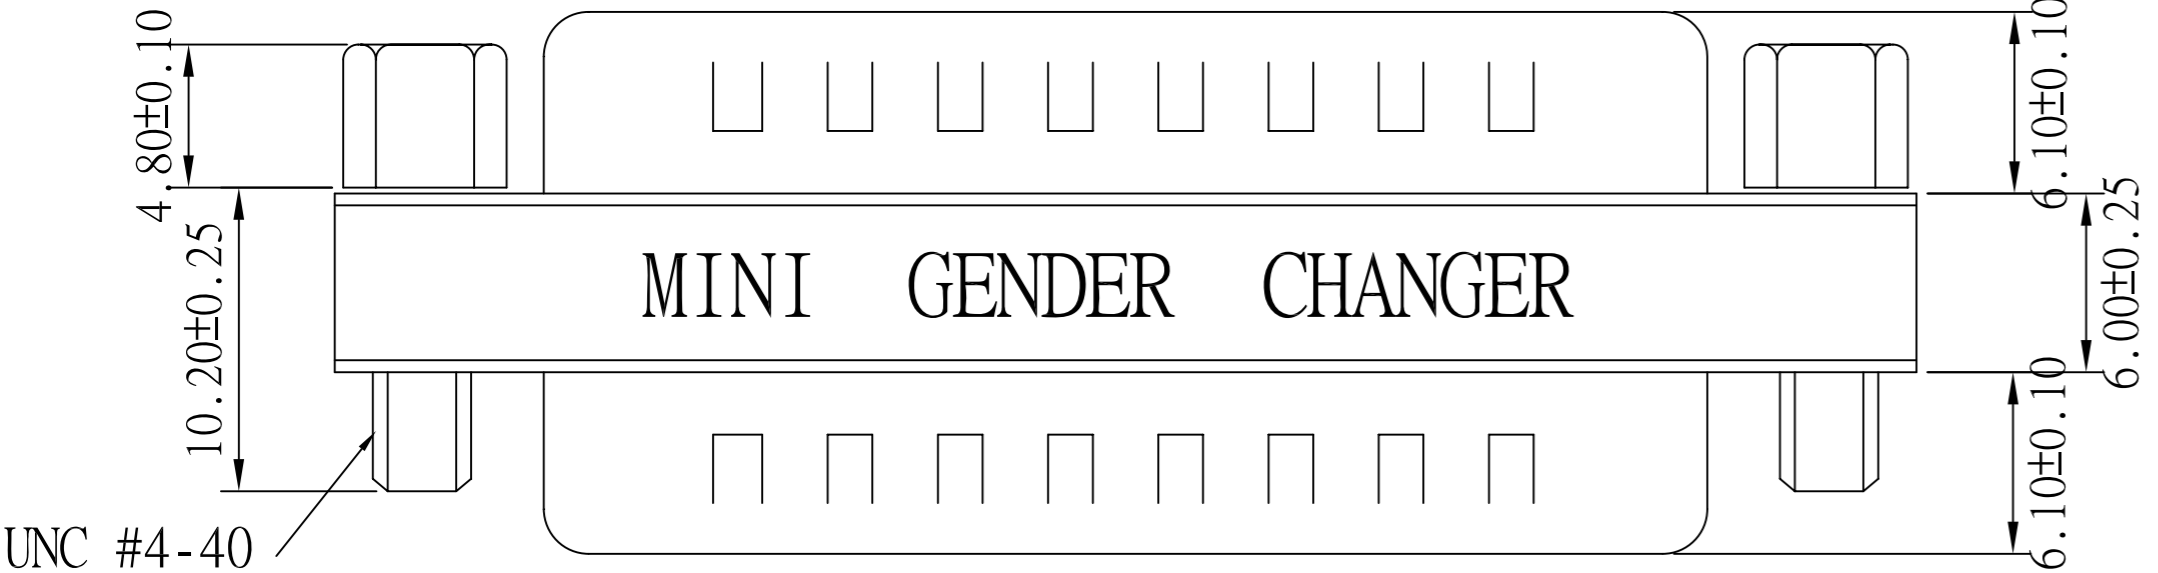


DGC 25 M/M GENDER CHANGER
PIN OUT: 25Male 25Male

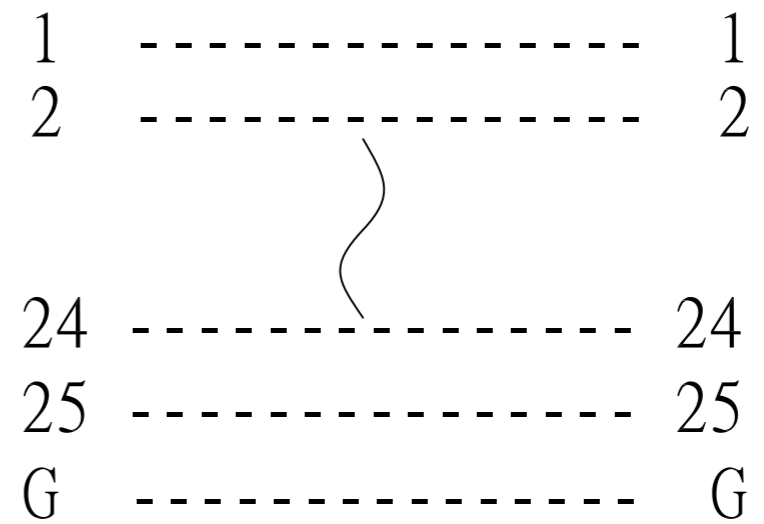

Label: yellow color with black charactor
 One side: MINI GENDER CHANGER
 The other side: U.S.A. PATENT 5199906 GENDER CHANGER
SPECIFICATION
 INSULATOR: PBT Glass fibre reinforced UL 94 V0
 CONTACT: Brass
 CONTACT PLATING: Gold plated over nickel
 SHELL: Tin Plated Shell
 CURRENT RATING: 3 AMP
 DIELECTRIC STRENGTH: 1000V AC for one minute
 INSULATOR RESISTANCE: 1000MΩ min at 500V DC
 TEMPERATURE: -55°C — +105°C

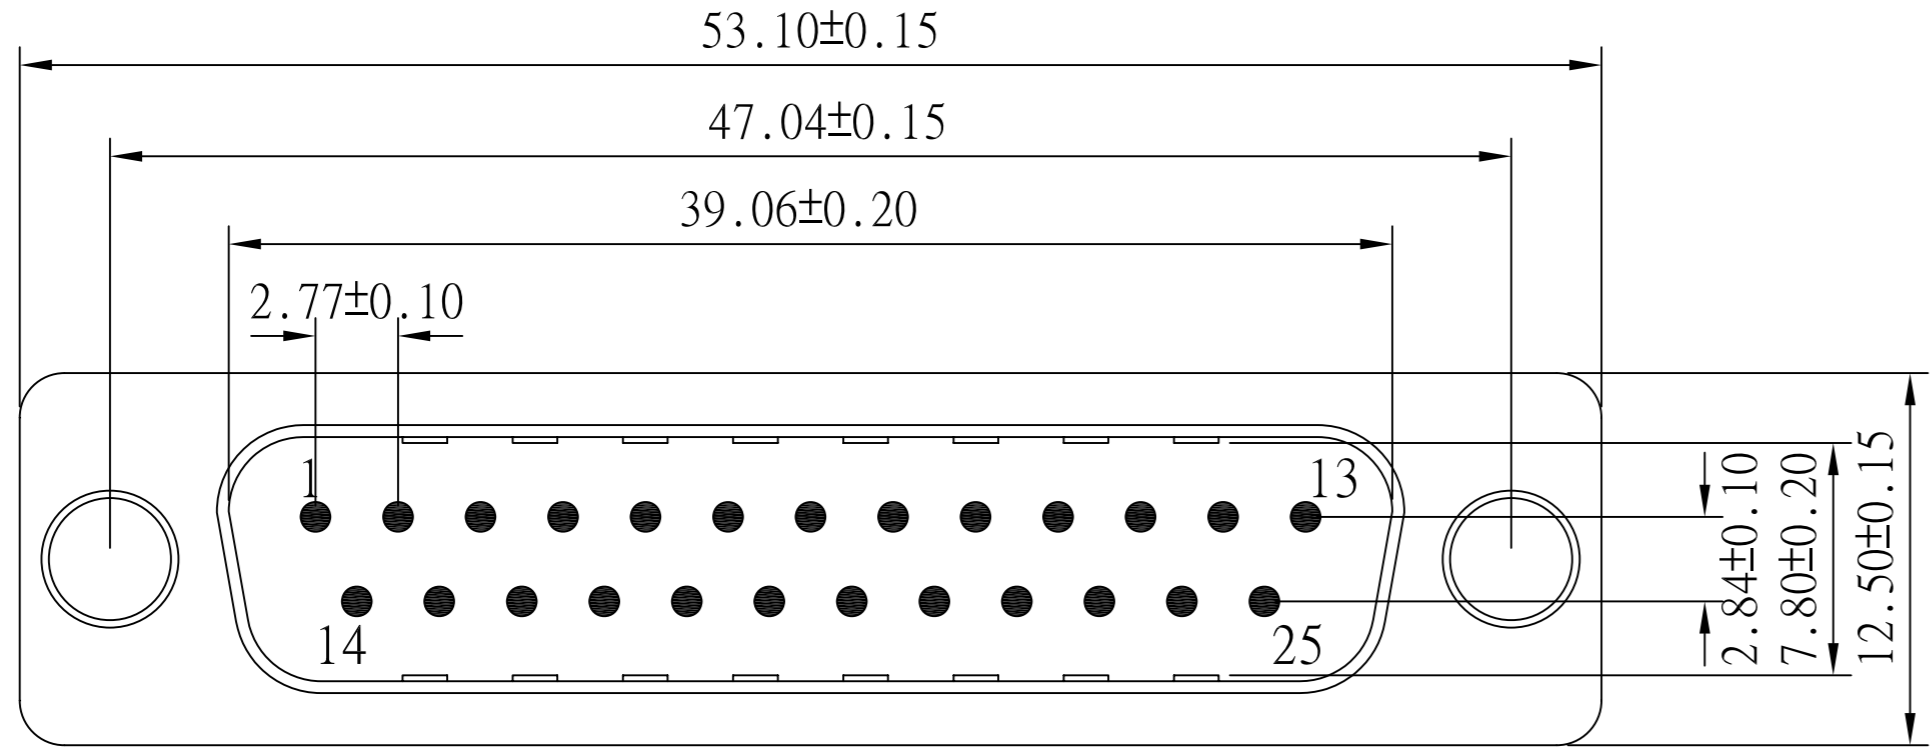

| | | | | | | | | | | |
|---------|---|--|--|--|--------------------------|--------|---------|--|-------|--|
| Edition | A2 | | | | ASSMANN ELECTRONICS GMBH | | | | | |
| SCALE | 2:1 | | | | | | | | | |
| UNIT | mm | | | | PART NO. | | DWG NO. | | DATE | |
| Page | 1/1 | | | | AB 414 | | | | | |
| |  | | | | DRAWN | NORMAN | CHECKED | | APPRD | |