


UNC #4-40 Hexscrew


UNC #4-40 Hexnut

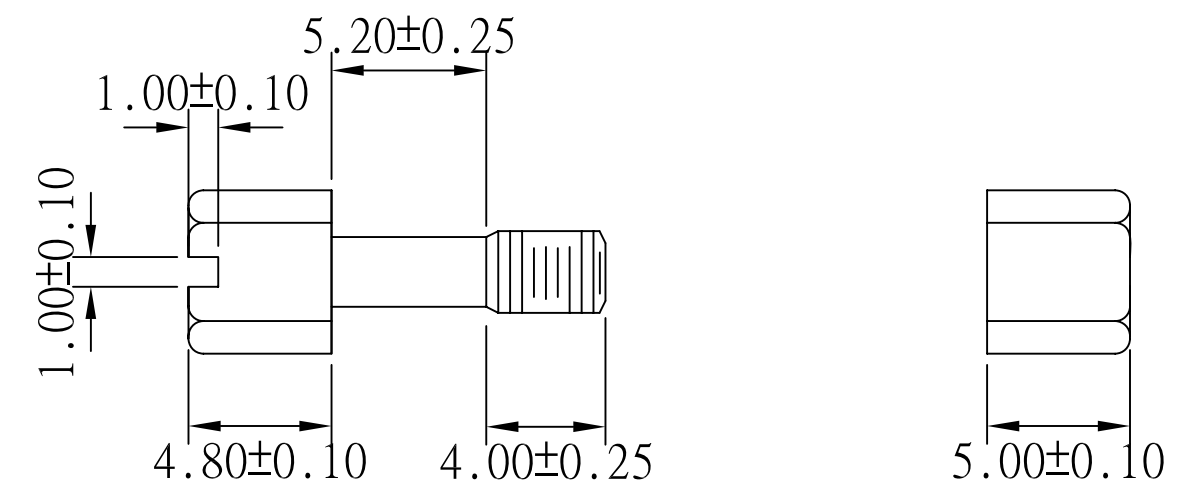

DGC 25 F/F GENDER CHANGER

PIN OUT: 25Female

25Female

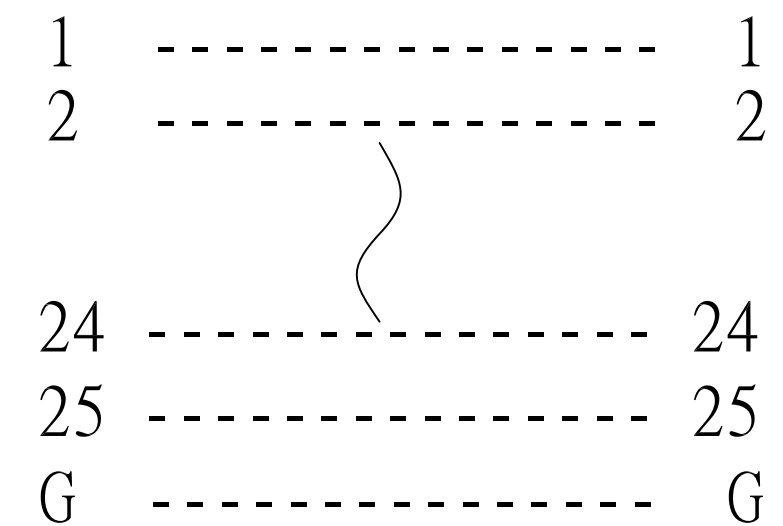

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C—+105°C

Edition	A01				ASSMANN ELECTRONICS GMBH			
SCALE	2:1		PART NO.		DWG NO.		DATE	
UNIT	mm		AB 415					
Page	1/1		DRAWN	NORMAN	CHECKED		APPRD	