

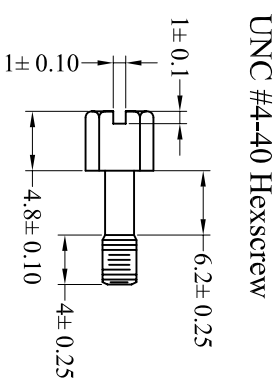
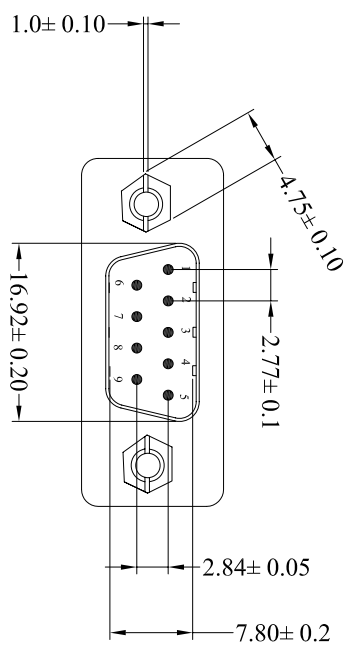


Signature	Date	Revision History	Date	Rev.
Norman Xu	Dec.20,2005	For Bulk Production	Dec.20,2005	01





PIN OUT: 9Male 9Male



NOTE:

1. Label: yellow color with black character.
2. One side: MINI GENDER CHANGER
3. The other side: U.S.A. PATENT 5199906 GENDER CHANGER
4. INSULATOR: PBT Glass fibre reinforced UL 94V-0.
5. CONTACT: Brass.
6. CONTACT PLATING: Gold plated over nickle.
7. SHELL: Tin Plated Shell.
8. CURRENT RATING: 3AMP
9. DIELECTRIC STRENGTH: 1000V AC for one minute.
INSULATOR RESISTANCE: 1000M OHM min at 500V DC
TEMPERATURE: -55°C----+105°C

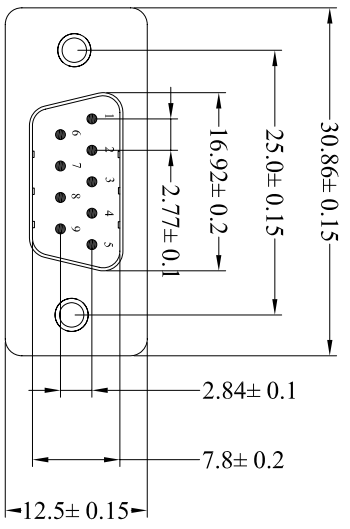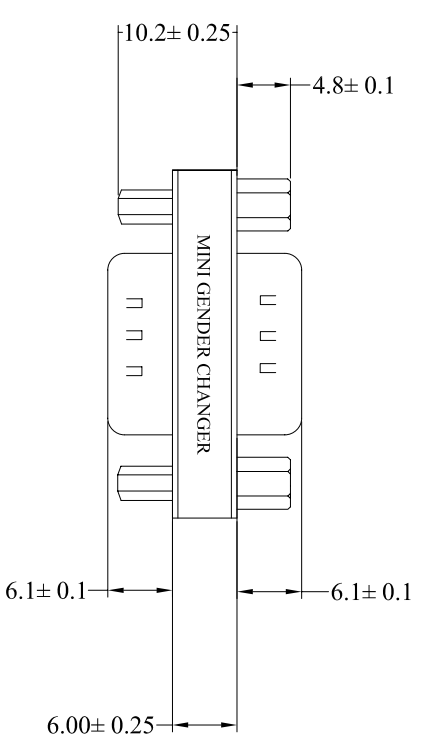

Date	Name
Dec.20,2005	Norman Xu
Dec.20,2005	Alex Dan
Approved by	

Part No.	AB 410
Title.	MINI GENDER CHANGER

ASSMANN
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	H