

1

2

3

4

5

6

7



| | | | |
|-----------|---------------------|-------------|------|
| Signature | Revision History | Date | Rev. |
| Norman Xu | For Bulk Production | Dec.20,2005 | 01 |

IEEE 1394 6M
PLASTIC:BLACK


5000 ± 50mm

IEEE 1394 6M
PLASTIC:BLACK

P1



P2



NOTE:

- CABLE: [28 AWG(7/0.127)T.C*1PAIR+AL/MYLAR+BRAID SHIELD(16/5/0.1)T.C]*2
+22AWG (7/0.254)T.C*2C+DRAIN WIRE(7/0.1)+MYLAR*2+AL/MYLAR+BRAID(24/8/0.1)90%
+PVC JACKET COLOR:MATT BLACK,OD:6.0±0.3mm
UL20276 APPROVED IEEE 1394 CABLE

2. CONNECTOR:


P1&P2 : IEEE1394 6 PIN MALE CONTAC:GOLD PLATED 15u"; NICKEL PLATED SHELL

3.HOOD : MOLDED TYPE,PVC 45P,COLOR:MATT BLACK.

4.TEST REQUESTED:

- <1>.100% OPEN SHORT MIS WIRE TEST
- <2>.CONTACT RESISTANCE 3Ω MAX
- <3>.INSULATION RESISTANCE 20MΩMIN

5.PACKING:SEE P-0039 REV.C PACKING DRAWING
PACKING TYPE :DB VP4
(HANKING SIZE MUST BE SMALLER THAN PACKING)

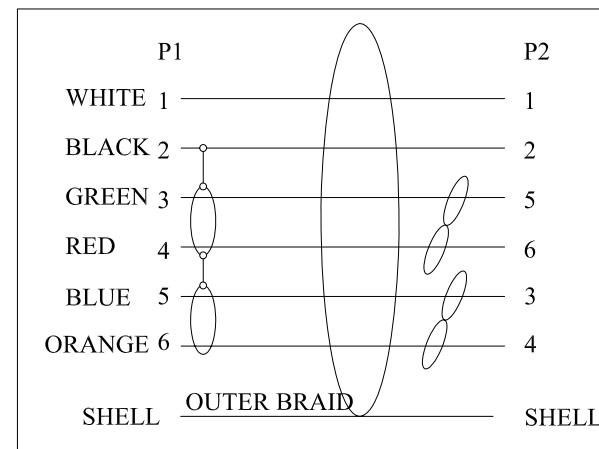

RoHS Compliant

EAN Code:
4016032051770

ST81407

| | | | | | |
|-----------------------------------|-------------|-----------|-------------------|--|-----|
| Date | | Name | | Part No. | |
| Drawn by | Dec.20,2005 | Norman Xu | AK-1394-50 | | |
| Checked by | Dec.20,2005 | Alex Dan | | | |
| Approved by | | | | | |
| ASSMANN Electronic GmbH | | | | Title: | |
| | | | | 1394 A 6PIN MALE TO 1394 A 6PIN MALE CABLE, 5.0M | |
| | | | | Scale | N/A |
| Unit | MM | | | | |

1

2

3

4

5

6

7