


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20.2005	01

USB A TYPE MALE 2000 ± 30mm USB B TYPE MALE

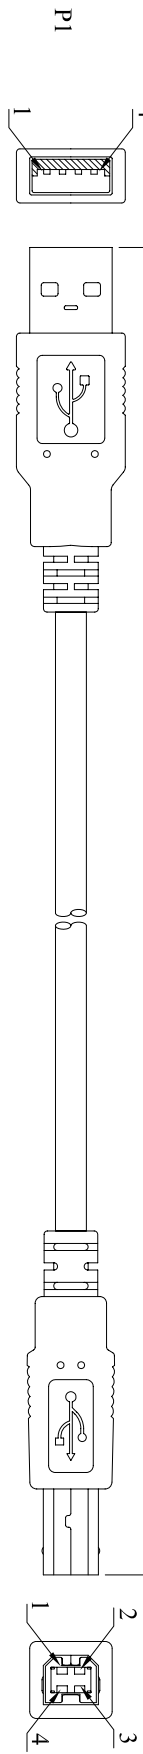

NOTES:
 1. CABLE: UL-2725 30AWG(7/0.102 B.C)*2C INS:SR-PVC ID:0.8± 0.05
 +30AWG(7/0.102 B.C)*2C INS:SR-PVC ID:0.6± 0.05+AL-FOLL/MYLAR
 +DRAIN WIRE 32AWG(1/0.203 B.C)+BRAID(8/2/0.1 T.C)
 PVC JACKET OD:4.0± 0.15mm COLOR:BLACK,REV 2.0

2.CONNECTER:
 P1: USB A TYPE MALE GOLD FLASH CONTACT,
 NICKEL PLATED SHELL
 P2: USB B TYPE MALE GOLD FLASH CONTACT,
 NICKEL PLATED SHELL

3.HOOD: MOLDED TYPE,PVC 45P, COLOR:BLACK
 4.ELECTRICAL TEST:

<1>100% OPEN SHORT & MIS WIRE TEST.
 <2>CONTACT RESISTANCE 3 Ohms MAX.
 <3>INSULATION RESISTANCE 20M Ohms MIN.
 5.PACKING:SEE P-0039 REV.C PACKING DRAWING
 PACKING TYPE:DB VP3
 (HANKING SIZE MUST BE SMALLER THAN PACKING)

P1	RED	1	VCC
	WHITE	2	-DATA
	GREEN	3	+DATA
	BLACK	4	GROUND
	SHELL		BRAID
P2		1	VCC
		2	-DATA
		3	+DATA
		4	GROUND
			SHELL

Drawn by	Dec.20.2005	Norman Xu	Part No. AK 672/2 AL
Checked by	Dec.20.2005	Alex Dan	
Approved by			
Title: Standard USB2.0 Connection Cable			

RoHS Compliant

EAN Code:
4016032183570

H	1	2	3	4	5	6	7	H
G								
F								
E								
D								
C								
B								
A								

STR1407

Scale	N/A	Sheet	1/1
Unit	MM		