


Signature	Revision History	Date	Rev.
	For Bulk Production	Dec.08.2007	01

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H

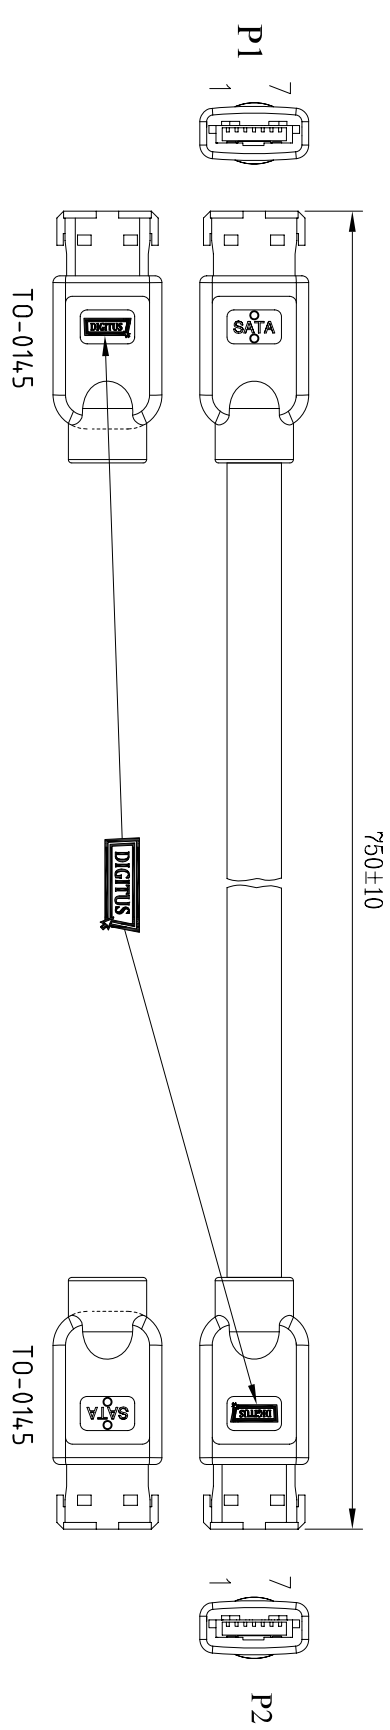


NOTES:

- CABLE:UL2725 [26AWG(1/0.404)*2F INS:HD-PE ID:1.3*2.7+DRAIN WIRE 28AWG(1/0.32)*2C+AL/MY]*2C INNER JACKET:PVC OD:7.3*2.1mm +AL/MY+BRAID(16/10/0.1)PVC JACKET, COLOR: BLACK, OD:9.0*4.0mm, IMPEDANCE: 100 OHM.
- CONNECTOR:

- P1&P2:SATA II 7P RIVETING TYPE CRIMP TYPE PBT BLACK G/F W/METAL SHELL
- SHIELD:COPPER-FOIL
- HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.
- TEST REQUEST:

- 100% OPEN SHORT MIS WIRE TEST
- CONTACT RESISTANCE 3 ohm MAX.
- INSULATION RESISTANCE 10M ohm MIN.
- HI-POT DC300V/0.01SEC.
- PACKAGING: SEE P-0039 PACKING DRAWING.
- (BINDING SIZE MUST BE SMALLER THAN BLISTER)

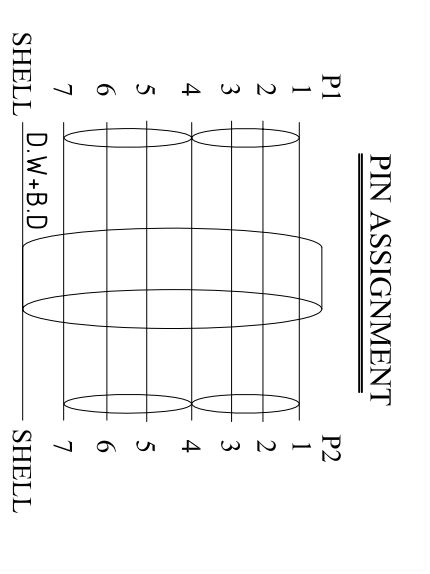

RoHS Compliant

Date	Name
Dec.08.2007	N. Xu
Dec.08.2007	ALDan
Dec.08.2007	T.Aulemann

Part No.	DK-126001
Title	SATA Cable, Connect,Sata L-Type, 2 COLOR MOLD WITH DIGITUS LOGO
Scale	N/A
Unit	MM
Sheet	1/1

STR1407

ASSMANN
Electronic GmbH