
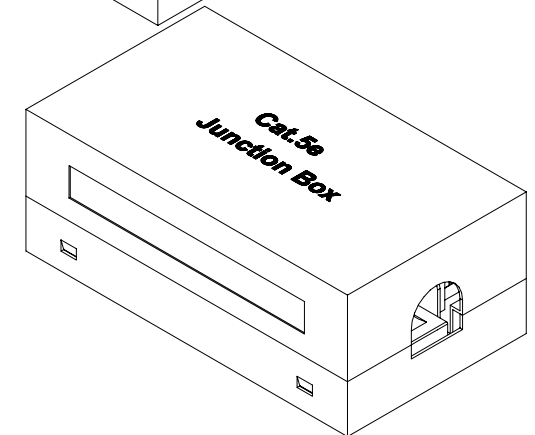
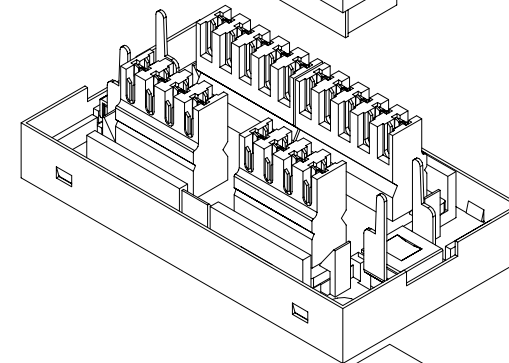
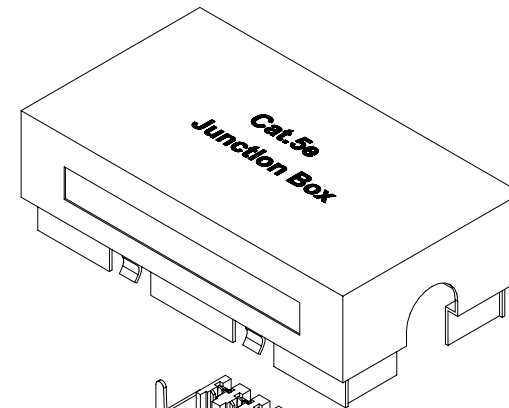


Top Shield  
Bottom Shield

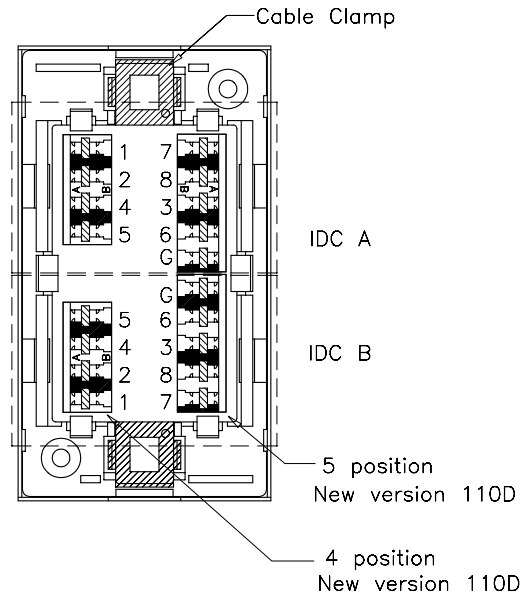

### Color coding information


T568B		
COLOR CODE	IDC A	IDC B
WHITE/BLUE	PIN.5	PIN.5
BLUE	PIN.4	PIN.4
WHITE/ORANGE	PIN.1	PIN.1
ORANGE	PIN.2	PIN.2
WHITE/GREEN	PIN.3	PIN.3
GREEN	PIN.6	PIN.6
WHITE/BROWN	PIN.7	PIN.7
BROWN	PIN.8	PIN.8

T568A		
COLOR CODE	IDCA	IDCB
WHITE/BLUE	PIN.5	PIN.5
BLUE	PIN.4	PIN.4
WHITE/GREEN	PIN.1	PIN.1
GREEN	PIN.2	PIN.2
WHITE/ORANGE	PIN.3	PIN.3
ORANGE	PIN.6	PIN.6
WHITE/BROWN	PIN.7	PIN.7
BROWN	PIN.8	PIN.8

### Specification

- Plastic  
Material : ABS. UL94 V0  
Color : White
- IDC : New Version 110D Connector.  
IDC Housing : PC, UL94 V0, White color.  
IDC Terminal : Phosphor Bronze with 50 micro-inch Tin-lead plated over 50-60 micro-inch Nickel plated.
- P.C.board: FR4 P.C.B. 1.2m/m thickness, double side.
- Shield: Bronze with Nickel plated.  
Color: Shining Nickel.

NOTE: TOL  $\pm$  0.1 m/m

	DSGN	Alice	21.MAY.2004	ITEM NO: <b>AT-ALSA-M</b>
	CHK			
UNIT	M / M	APPR		Cat.5e Junction Box, Full Shielded
SCALE	1/1			
DWG NO: AT-ALSA-M	<b>ASSMANN Electronic Components</b>			