



<b>Customer</b>		<b>RoHS</b>	Yes
<b>Product Name</b>	Designated Power Distribution Unit for Cabinet	<b>Customer's Code</b>	
<b>Part Number</b>	DN-95404	<b>Picture Code</b>	GMAS0360903002
<b>No.</b>	<b>Item</b>	<b>Detailed Description</b>	
1	Product Series	DN-95404	
2	Socket Type	Single anti-fall IEC320 C13 Socket [10];	
3	Socket Quantity	10 way	
4	Power Input	Left end single input	
5	Bracket Install	Frontal installation	
6	Cable with plug	IEC320 C14 10A plug	
7	Control Function	Master overload protecting & power indicator	
8	Protection Function	No protecting function	
9	Case	Aluminium	
10	Cable Specification	3 x 1.5 mm <sup>2</sup> x 2M	
11	Product Size	L x W x H = 482.6 x 44.4 x 44.4 mm	
12	Mounting Length	465 mm	
13	Case Length	400.5 mm	
14	Fittings	2pcs φ6×16mm cross bolt, 2pcs M6 float nut,	
15	Product Label	Product Name	Designated Power Distribution Unit for Cabinet
		Specification Model	DN-95404
		Rating voltage	250VAC 50/60Hz
		Rating Current	10A
		Max. Current	
		Max. Power	25000W
		Safety Authentication	CE
		Logo	RoHS
Producer			
<b>No.</b>	<b>Add-In</b>		
1	Socket assemble		
2	Interior Connection Wire	1.5 mm <sup>2</sup>	
3	Interior Connection Style	Standard connection	
4	Fix the Cable	Small cable clamp	
5	Module Assemble (Form left to right )		
6	Others		

Preview

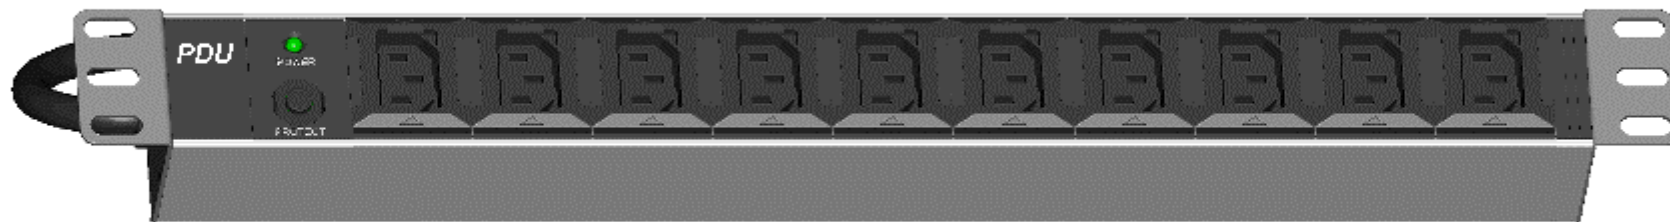

IEC320 C14 10A plug

DIMENSION AND TOLERANCES (Unit: mm)			 <b>DN-95404</b>	
Length: 482.6	Mounting length: 465			
Width: 44.4	Case length: 400.5	Customer		
Height: 44.4	Case tolerance: $\pm 1.0$	Product name		Designated Power Distribution Unit for Cabinet
	SIGN	DATE	Part number	
DRAWN		18.03.2009	Customer's code	
CHK'D			Drawing number	
APP'D			Edition number	
			GMAS0360903002	

NO.: GMAS0360903001