


1.2 Physical Diagram

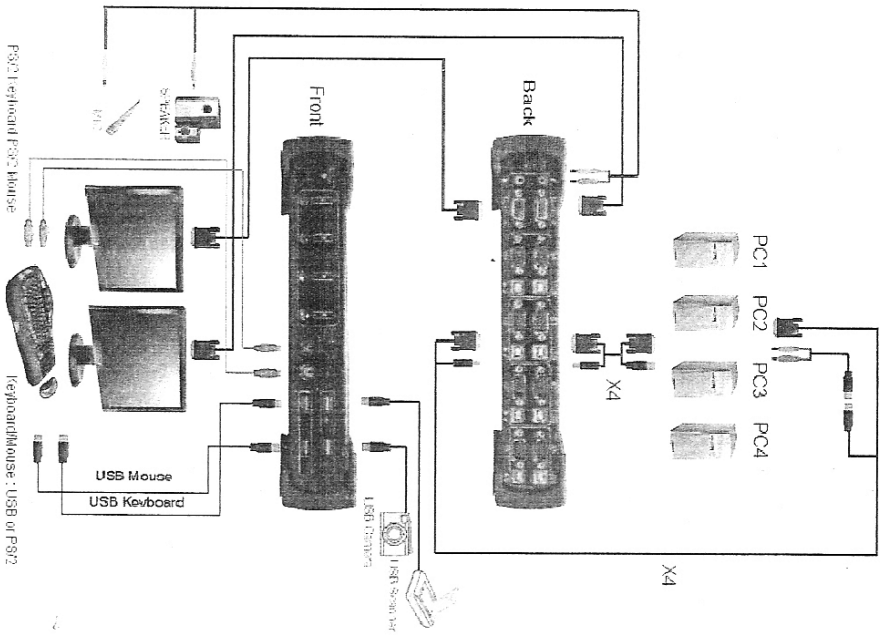

1.3 Package Contents

The product you purchased should contain the equipment and accessories shown as follows:

- 1 1 x 4 Ports USB Dual VGA KVM Switch with Audio.
- 2 4 x USB/VGA cable.
- 3 4 x Specific USB-Audio cable.
- 4 1 x External power adaptor DC 5V 2A
- 5 1 x User Manual

2 Specifications

2.1 General

	Specification
Number Of Computer Controlled	4
Selection Method	Push Button/Hot Key
LEDS	Host Selected LED (RED) HUB Selected LED (Green) Auto Switch & Auto Scan LED (Green)
Compliant with USB Version	USB1.0 / USB1.1 / USB2.0
Compliant with HID Version	USB HID 1.11
PC Connectors	8 x VGA WUXGA male 4 x USB Type B female (For USB) 4 x USB Type B female (For Audio) 2 x VGA WUXGA female
Console port	1 x PS/2 6 pin mini-DIN female 1 x USB Type A female 1 x PS/2 6 pin mini-DIN female 1 x USB Type A female 1 x Audio Jack Female (Pink) 1 x Audio Jack Female (Green)
USB Downstream ports	2 x USB Type A female
Auto-Scan Interval	5, 10, 15, 20 sec
DDC, DDC2 monitor	Yes(Max Resolution:2048x1536 @35Hz)
Operating system supported	Win 98/98SE/ME/2000/XP/Vista/7, Mac OS9/X, Linux, Sun Micro OS
Cables Included	4 sets of specific USB - Audio cable 4 sets of USB and VGA cable
Cable Length	1.8 Meter (USB/VGA cable) 20 cm (specific USB-Audio cable)
Power	By External Adaptor
Output Voltage	5V
Output Current	2A
Hot Pluggable	Yes
Device driver	No
Dimensions (LxWxH)	269 x 81 x 44 mm
Unit Weight	1073 g