

NOTE:


1. CABLE: NON-UL 28AWG(7/0.127 TINNED)*25C+ DRAIN WIRE+AL-FOIL/MYLAR PVC JACKET , CLOR. BEIGE(NK-A03) , OD. $\phi 7.0 \pm 0.2$ mm.
2. CONNECTOR:
P1&P2: DB25P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
3. HOOD: MOLDED TYPE , PVC 45P , COLOR: BEIGE(NK-A03).
4. ELECTRICAL TEST: 100% OPEN SHORT MIS WIRE TEST.
INSULATION RESISTANCE 1M Ω MIN.
5. PACKING: EACH PC / POLYBAG.

120-1154-5	AK 164	10000	50
120-1154-4	AK 163	7000	50
120-1154-3	AK 154	5000	50
120-1154-2	AK 162	3000	30
120-1154-1	AK 137	2000	30
DWG	P/N	L (mm)	T (mm)

ASSMANN
 Electronic GmbH
 Am dem Schiffei 3
 58513 Lindenscheid

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
Drawn	KIKI 07/03	
Check	04.03.07	
Engn	Cze	
App'd	Customer P/N	Customer E-SSM
Scale	NONE	Units
Dwg No	120-1154	REF: 1
Sheet	1/1	

HIGH QUALITY CONNECTION

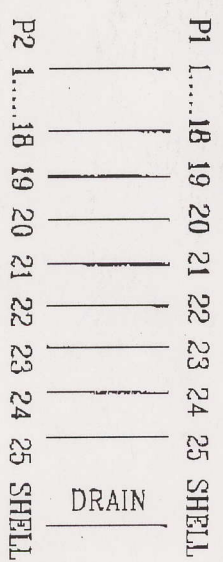

LTR	REV.	DESCRIPTION	DATE