
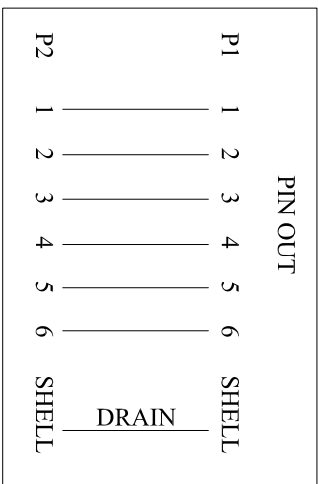


Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Dec.20,2005	01

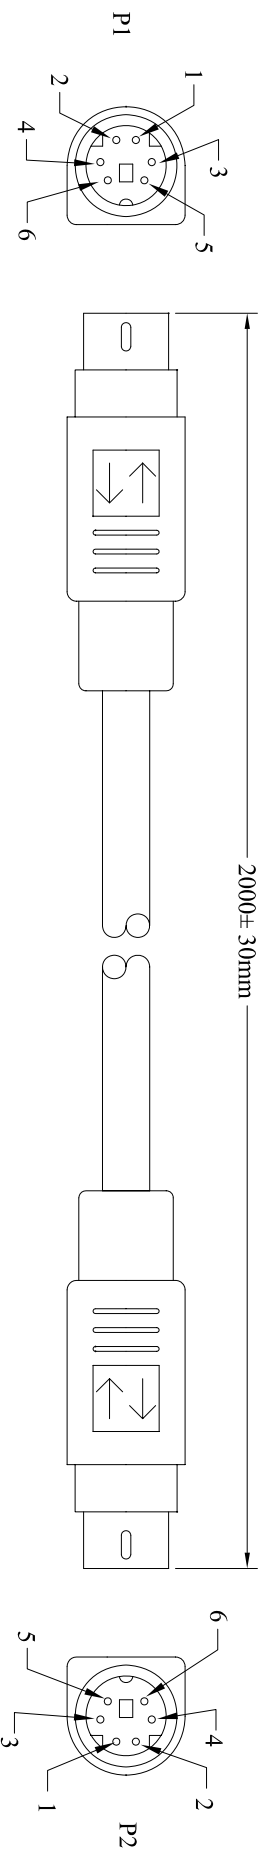

**NOTES:**

- 1.CABLE:NON-UL 28AWG(7/0.127)TC\*6C INS:PVC+DRAIN WIRE+ AL-FOIL PVC JACKET COLOR:BEIGE.  
OD:Ø5.0± 0.2mm
- 2.CONNECTOR:  
P1&P2:MD6P MALE TINNED PLATED CONTACT, NICKEL PLATED SHELL.
- 3.HOOD:MOLDED TYPE, PVC 45P,COLOR:BEIGE.
- 4.ELECTRONIC TEST: <1>100% OPEN SHORT & MIS WIRE TEST.  
<2>CONTACT RESISTANCE 3 OHMS MAX.  
<3>INSULATION RESISTANCE 20M OHMS MIN.
- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING  
(HANKING SIZE MUST BE SMALLER THAN PACKING)  
PACKING TYPE: DB VP3.

Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

Part No.	<b>AK 678 2M</b>
Title.	

RoHS Compliant

EAN Code:  
40160332064534

STR1407

**ASSMANN**  
Electronic GmbH

Title.		MD6/M - MD6/M CABLE	
Scale	N/A	Sheet	1/1
Unit	MM		

A	1	2	3	4	5	6	7	
B	1	2	3	4	5	6	7	
C	1	2	3	4	5	6	7	
D	1	2	3	4	5	6	7	
E	1	2	3	4	5	6	7	
F	1	2	3	4	5	6	7	
G	1	2	3	4	5	6	7	
H	1	2	3	4	5	6	7	