


Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2005	01

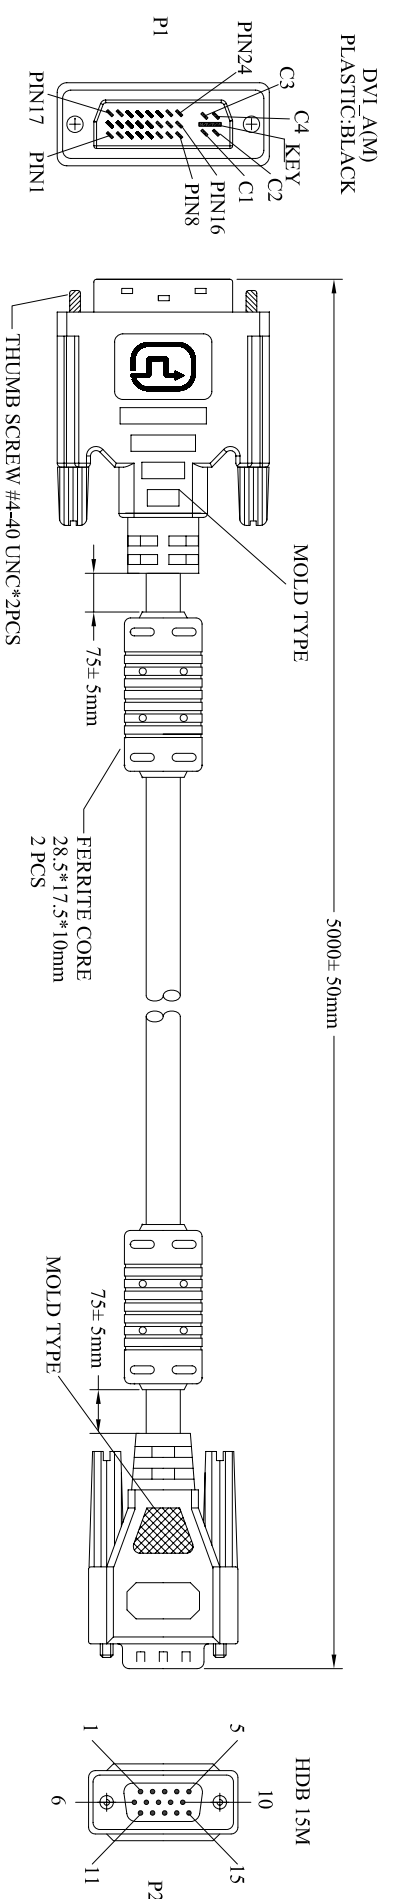

WIRE CONNECTION

P1	WIRE COLOR	P2
6	—	15
7	—	12
8	—	14
14,16	—	9
15	—	5,10
C1	—	1
KEY	—	6
C2	—	2
KEY	—	7
C3	—	3
KEY	—	8
C4	—	13
SHELL	BRAID SHIELDS	SHELL

NOTES:

- CABLE: 30AWG(7/0.102)COAXIALX3C+28AWG(7/0.127)x5C+28AWG(7/0.127)*1PAIR+AL/MYLAR+BRAID SHIELD+JACKET:PVC OD:7.0± 0.15mm COLOR:BLACK UL 2027/6 APPROVED
- CONNECTOR:
P1: DVI 29P: 24P+4KEY DIGITAL/ANALOG GOLD FLASH CONTACT NI PLATED SHELL
P2: HDB 15P MALE GOLD FLASH CONTACT NICKEL PLATED SHELL
- SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- HOOD:
P1&P2: MOLDED TYPE, PVC 45P, COLOR:BLACK
- TEST REQUEST:
(1) 100% SHORT OPEN & MIS WIRE TEST
(2) CONTACT RESISTANCE 3 OHMS MAX
(3) INSULATION RESISTANCE 20M OHMS MIN
(4) HI-POT VOLTAGE 300V DC
- PACKING: SEE P-0039 REV.C PACKING DRAWING (HANKING SIZE MUST BE SMALLER THAN PACKING) PACKING TYPE: DB VP5.

Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

Part No.
AK 622N-5

ASSMANN
Electronic GmbH

Title.
**DVI D/A - VGA
HDB15 CABLE**

Scale	N/A	Sheet	1/1
Unit	MM		

Rohs Compliant

EAN Code: 4016032126188

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	A
H	G	F	E	D	C	B	A