


| | | | |
|-----------|---------------------|-------------|------|
| Signature | Revision History | Date | Rev. |
| Alex Dan | For Bulk Production | Dec.20,2005 | 01 |

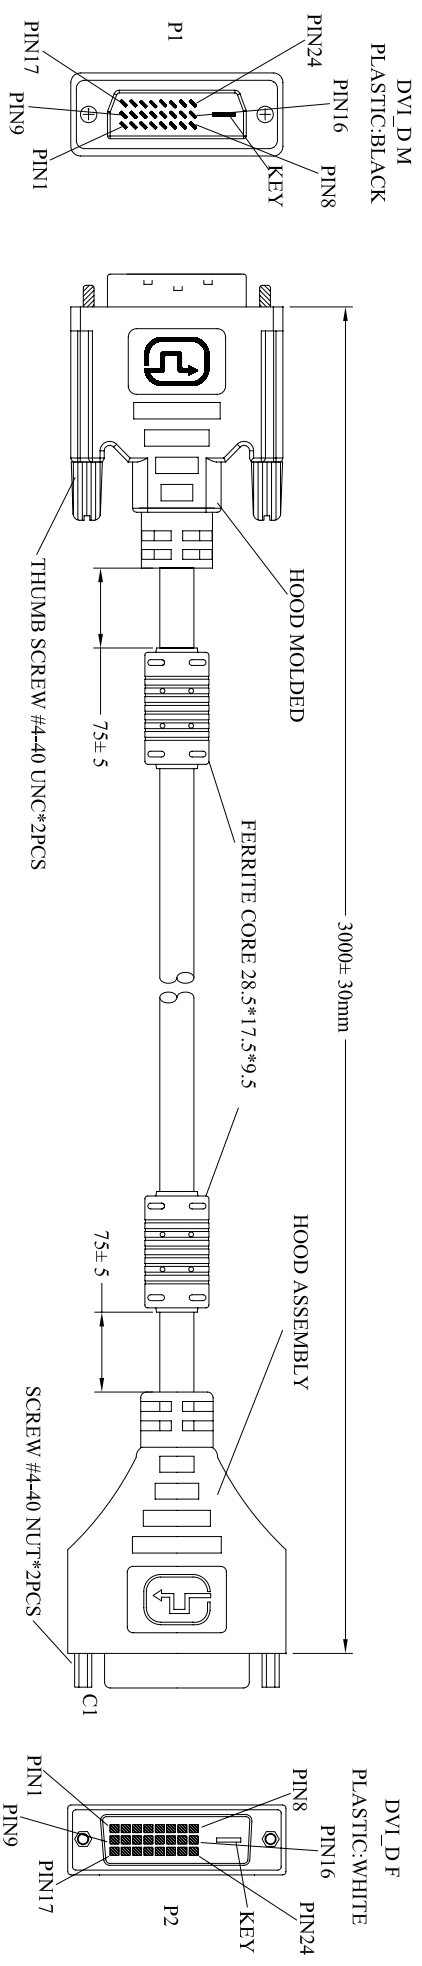

NOTES:

1. CABLE: 128AWG(7/0.127)*1P+DRAIN WIRE+AL/MYLAR*7C+28AWG(7/0.127)T.C*1P+28AWG(7/0.127)*3C+AL/MYLAR+BRAID SHIELDS+JACKET:PVC
OD: 8.6±0.15mm UL20276 APPROVED. COLOR:GRAY.
2. CONNECTOR: P1: DVI_D 25P-24P+KEY MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
P2: DVI_D 25P-24P+KEY FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
3. SHIELD: P1: COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
4. HOOD: P1: MOLDED TYPE, PVC 45P, COLOR:GRAY.
P2: ASSY TYPE & METAL CAN COLOR:GRAY.
5. FERRITE CORE: (28.5*17.5*9.5) X 2
6. TEST REQUESTED:
(1) 100% OPEN SHORT & MIS WIRE TEST
(2) CONTACT RESISTANCE 3 OHM MAX
(3) INSULATION RESISTANCE 20M OHM MIN
(4) HI-POT VOLTAGE 300V DC
7. PACKING: SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPE: DB VP4.

WIRE CONNECTION

| P1 | WIRE COLOR | P2 |
|-------|---------------|-------|
| 1 | | 1 |
| 2 | | 2 |
| 3 | | 3 |
| 3 | | 3 |
| 4 | | 4 |
| 5 | | 5 |
| 6 | | 6 |
| 7 | | 7 |
| 9 | | 9 |
| 10 | | 10 |
| 11 | | 11 |
| 11 | | 11 |
| 12 | | 12 |
| 13 | | 13 |
| 14 | | 14 |
| 15 | | 15 |
| 16 | | 16 |
| 17 | | 17 |
| 18 | | 18 |
| 19 | | 19 |
| 19 | | 19 |
| 20 | | 20 |
| 21 | | 21 |
| 22 | | 22 |
| 23 | | 23 |
| 24 | | 24 |
| SHELL | BRAID SHIELDS | SHELL |

Rohs Compliant

EAN Code: 4016032126195

STR1407

| | |
|-------------|-----------|
| Date | Name |
| Dec.20,2005 | Alex Dan |
| Checked by | Norman Xu |
| Dec.20,2005 | |
| Approved by | |

| | |
|----------|---------------------------------------|
| Part No. | AK 626-3 |
| Title. | DVI_D-DVI_D DUAL LINK EXTENSION CABLE |
| Scale | N/A |
| Unit | MM |
| Sheet | 1/1 |

ASSMANN
Electronic GmbH

| | | | | | | |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| H | G | F | E | D | C | B |