


Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2005	01

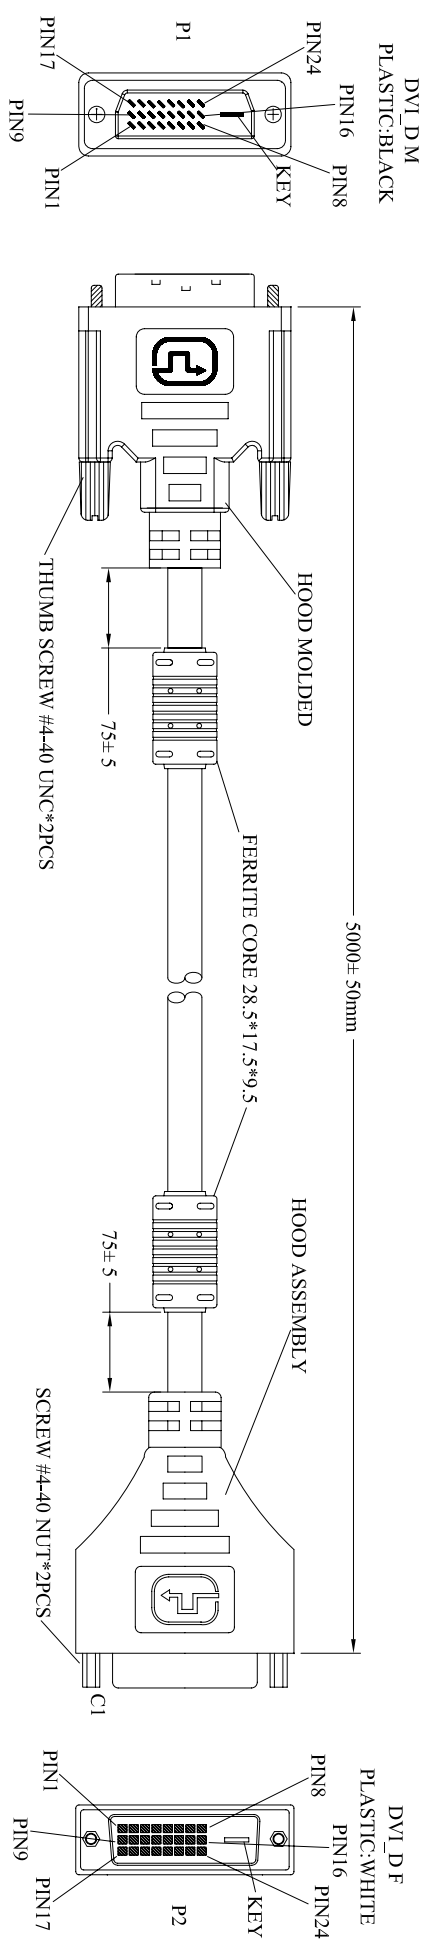

NOTES:

1. CABLE:[28AWG(7/0.127)*1P+DRAIN WIRE+AL/MYLAR]*7C+28AWG(7/0.127)T.C*1P+28AWG(7/0.127)*3C+AL/MYLAR+BRAID SHIELDS+JACKET:PVC
OD: 8.6±0.15mm UL20276 APPROVED. COLOR:GRAY.
2. CONNECTOR: P1: DVI_D 25P: 24P+KEY MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
P2: DVI_D 25P: 24P+KEY FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
3. SHIELD: P1: COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
4. HOOD: P1: MOLDED TYPE, PVC 45P, COLOR:GRAY.
P2: ASSY TYPE & METAL CAN COLOR:GRAY.
5. FERRITE CORE: (28.5*17.5*9.5) X 2
6. TEST REQUESTED :
(1) 100% OPEN SHORT & MIS WIRE TEST
(2) CONTACT RESISTANCE 3 OHM MAX
(3) INSULATION RESISTANCE 20M OHM MIN
(4) HI-POT VOLTAGE 300V DC
7. PACKING: SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPE: DB VPS.

WIRE CONNECTION

P1	WIRE COLOR	P2
1		1
2		2
3		3
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

Rohs Compliant

EAN Code: 4016032126201

STRIP00

Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

ASSMANN
Electronic GmbH

Title:		DVI_D-DVI_D DUAL LINK EXTENSION CABLE	
Scale	N/A	Sheet	1/1
Unit	MM		

Part No.	AK 626-5
----------	----------

1	2	3	4	5	6	7
H	G	F	E	D	C	B