



Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec:20,2005	01

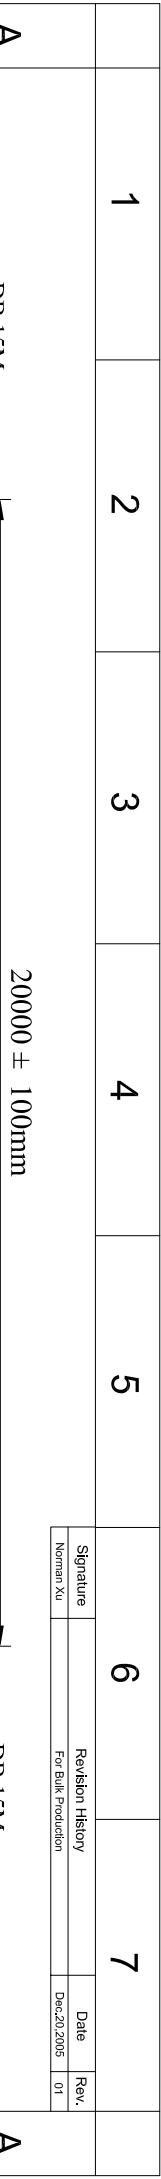

NOTE:

- 1. CABLE: 28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INS:FO-PE INNER JACKET:PVC OD: 2.5 ± 0.1mm UL-1354+28AWG(7/0.127 T.C)*7C+INS: SR-PVC ID: 0.85 ± 0.05mm UL-1061+AL/MY+DRAIN WIRE: 26AWG (7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR: BEIGE, OD: 08.5 ± 0.15mm UL-2919.
- 2. CONNECTOR: P1&P2 : HDB 15P MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL. 9TH PIN IS EMPTY.
- 3. FERRITE CORE: 17.5*28.5*9.5mm.
- 4. SHIELD: COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.
- 5. HOOD: MOLDED TYPE, PVC 45P, COLOR: BEIGE.
- 6. ELECTRICAL TEST: 100% OPEN SHORT MIS WIRE TEST. CONTACT RESISTANCE 3 Ω MAX INSULATION RESISTANCE 20M Ω/MIN

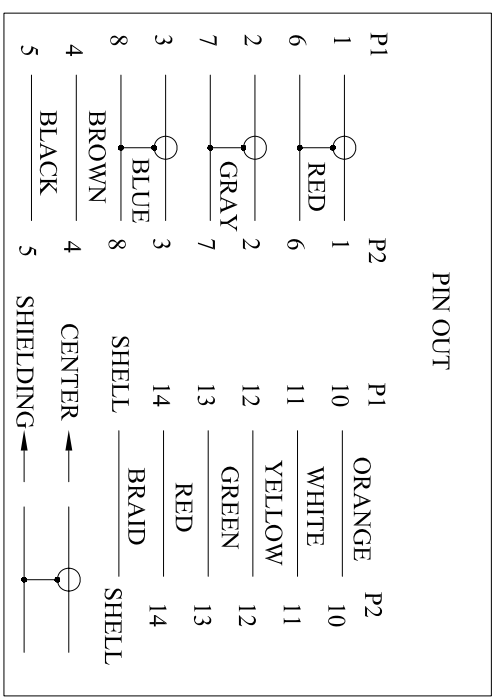

- 7. PACKING: SEE P-0039 REV. C PACKING DRAWING.
- PACKING TYPE: DB VPS
- (HANKING SIZE MUST BE SMALLER THAN PACKING)

A									
B									
C									
D									
E									
F									
G									
H									

RoHS Compliant

EAN CODE:
4016032089407

	Date	Name
Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

ASSMANN

Electronic GmbH

	Part No.
AK 3820XF	
Title:	
Premium XGA Monitor connection cable with ferrite core	

STR1407

Scale	N/A	Sheet
Unit	MM	1/1