


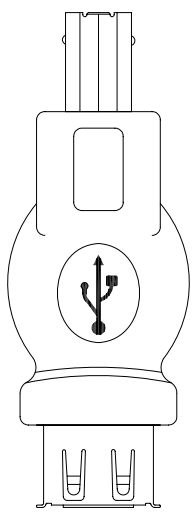


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

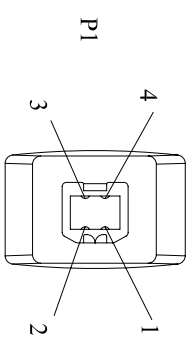

USB B MALE

USB A FEMALE

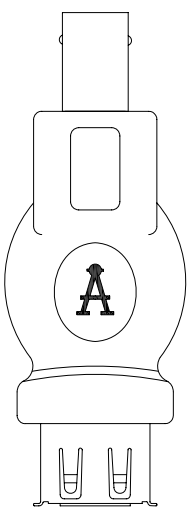

PIN OUT	
P1	P2
1 _____	1 _____
2 _____	2 _____
3 _____	3 _____
4 _____	4 _____
SHELL _____	SHELL _____

NOTES:

- 1.WIRE: NON-UL 26AWG(7/0.16) TINNED COPPER
- 2.CONNECTOR:
 - P1: USB B MALE GOLD FLASH CONTACT;
 - NICKEL PLATED SHELL; PLASTIC: WHITE
 - P2: USB A FEMALE GOLD FLASH CONTACT;
 - NICKEL PLATED SHELL; PLASTIC: WHITE
- 3.HOOD: MOLDED TYPE PVC 45P COLOR: BEIGE.
- 4.TEST REQUESTED :
 - 1.) 100% OPEN SHORT & MIS WIRE TEST
 - 2.) CONTACT RESISTANCE 3 OHM MAX
 - 3.) INSULATION RESISTANCE 20M OHM MIN
 - 5.PACKING: SEE P-0039 REV.C PACKING DRAWING

RoHS Compliant

EAN Code:
4016032066873

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	A-USB-2
Title:	USB A/F TO USB B/M ADAPTER

STN1407

ASSMANN
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	H