



Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Dec.20,2005	01

1 2 3 4 5 6 7

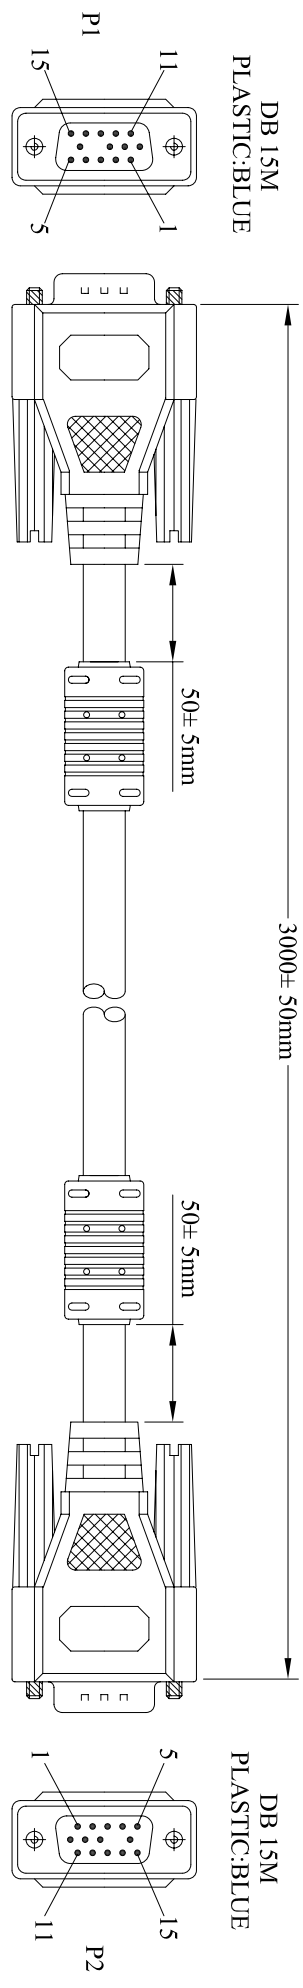

NOTES:

- 1.CABLE:[30AWG(7/0.102 T.C)*1C INS:FOAM-PE ID:1.3±0.05 +SPIRAL(T.C)]*3C INS:PVC ID:2.3±0.1+28AWG(7/0.127 T.C)*7C +INS:SR-PVC ID:Ø0.9±0.05mm+AL/MY+DRAIN 30AWG(7/0.102 T.C) +BRAID (16/4/0.1 T.C)+OUTER JACKET:PVC COLOR:BLACK. OD:Ø7.5±0.15mm UL-2919 SUPPLIER:LIAN FENG(GLL)
- 2.CONNECTOR: P1&P2:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL. 9TH PIN IS EMPTY.
- 3.FERRITE CORE:17.5*28.5*9.5mm.
- 4.SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.
- 5.HOOD:MOLDED TYPE,PVC 45P,COLOR:BLACK.
- 6.ELECTRONIC TEST:100% OPEN SHORT MIS WIRE TEST. CONTACT RESISTANCE 3 OHMS MAX INSULATION RESISTANCE 20 M OHMS MIN
- 7.PACKING:SEE P-0039 REV.C PACKING DRAWING. (HANKING SIZE MUST BE SMALLER THAN PACKING) PACKING TYPE: DB VP4.

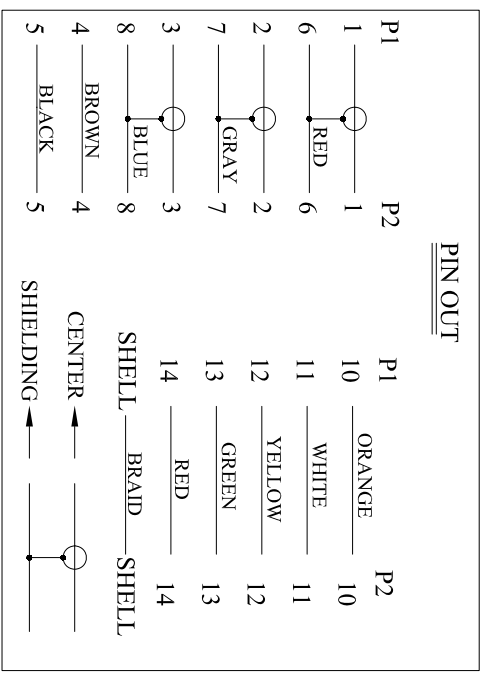

H

1 2 3 4

RoHS Compliant

EAN Code: 4016032183624

Part No.	AK 3760XF AL		
Title.	HDB 15M/M CABLE 3.0M		
Scale	N/A	Sheet	1/1
Unit	MM		

Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

STR1407

ASSMANN
Electronic GmbH

H