

1

2

3

4

5

6

7

Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2006	01

A

A

B

B

C

C

D

D

E

E

F

F

NOTE:

- 1. CABLE:
UL2725 80°C 30V [26AWG(1/0.404)×2F+AL/MY+DRAIN WIRE(1/0.32)×2]TIN
INS:FOAM-PE OD:φ1.1±0.05mm, PVC JACKET OD:φ(2.2±0.1)×(7.8±0.2)mm COLOR:RED (PANTONE 200C)
- 2. CONNECTOR:
P1: SATA I 7P L TYPE PBT BLACK G/F W/METAL SHELL
P2: SATA 7P GOLD FLASH CONTACT, W/METAL LATCH
- 3. HOOD: MOLDED TYPE, PVC 45P, COLOR:BLACK
- 4. CABLE ASS'Y ELECTRICAL TEST:
4-1 100% OPEN SHORT & MIS WIRE TEST
4-2 CONTACT RESISTANCE 3 OHM MAX
4-3 INSULATION RESISTANCE 10M OHM MIN
4-4 HI-POT DC300V/0.01SEC.
- 5. PACKING: SEE P-0039 REV.C PACKING DRAWING


RoHS Compliant

EAN Code:
4016032180197

500±20mm

P1

P2

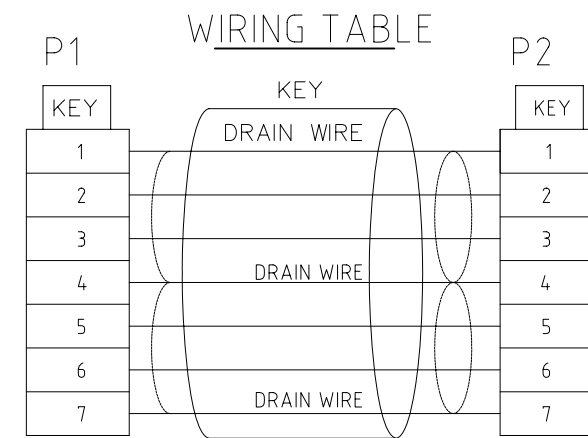

	Date	Name	Part No. AK-SATA-SB1
Drawn by	Dec.20,2006	Alex Dan	
Checked by	Dec.20,2006	Norman Xu	
Approved by			

ASSMANN
Electronic GmbH

Title. Slotbracket with SATA Connector		
Scale	N/A	Sheet
Unit	MM	1/1

ST81407

1

2

3

4

5

6

7

H

H